






-  Octal SMT Package contains both transmit and receive transformers
-  Models matched to leading transceivers
-  RoHS Compliance
-  UL recognized
-  Operating temperature range: 0°C to +70°C


PRELIMINARY



### Electrical Specifications @25°C

Part Number	Turns Ratio (±2%) Pri:Sec	OCL PRI (mH Min) 100KHz, 0.1V	LL (uH Max) 100KHz 0.1V	CWW (pF Max) 100KHz 0.1V	DCR(25°C) (Ω Max) Pri	HI-POT 1500VAC	Primary Pins	
							Transmit	Receive
TE4008CG	1CT:2&1:2CT	1.2&1.2	0.6&0.6	35&35	1.2		4-5,9-10,14-15,19-20	1-3,6-8,11-13,16-18

## MECHANICAL

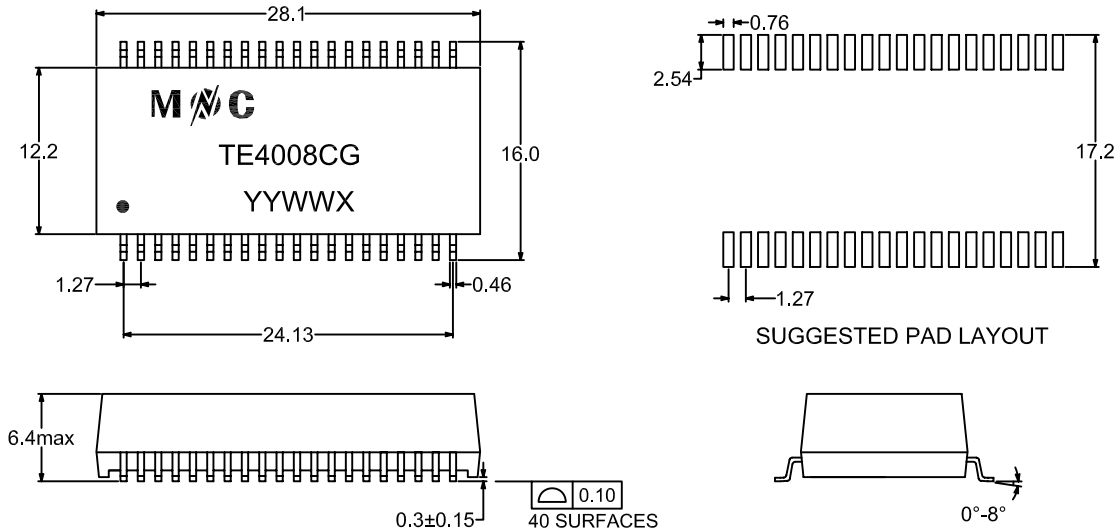

Unless otherwise specified all tolerances are:±0.25 in mm

## SCHEMATICS

